



MBA

2023.1

Thumbs Screws & Nuts



INDEX

Thumb Nuts	3-4
Thumb Screws	5-21
Captive Thumb Screws	22-25

This listing is intended as a quick guide to the sizes and styles available.

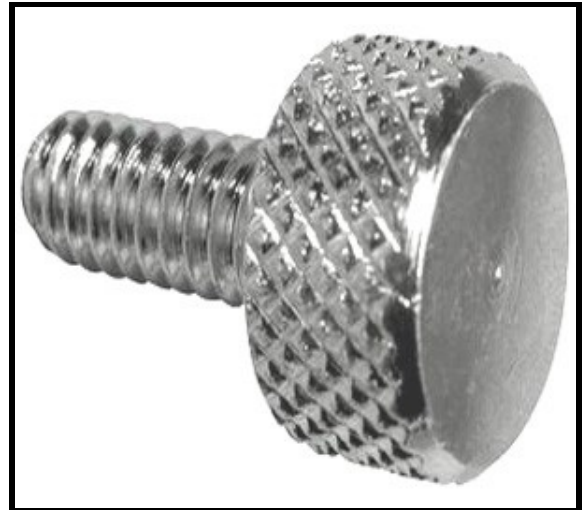
For more details on any item please enter the part number into the search box on our website.

To find and order parts online, simply enter the part number from this catalogue into the search box on any web page.

Thumb Nuts



Thumb Screws
Standard Example







Captive Thumbs Screws



Thumb Nuts



Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
2-56 UNC (2.184mm) Thread Size					
6.40 (0.25")	3.18 (0.13")	6.35		Stainless 303	NT022C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
4-40 UNC (2.845mm) Thread Size					
6.40 (0.25")	3.18 (0.13")	7.94		Stainless 303	NT028C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless 303	NT028C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
M3x0.5 (3mm Standard) Thread Size					
7.50 (0.30")	2.50 (0.10")	12.00	6.00 (0.24")	303 Stainless Steel	NT030M-TH1205-S3 <i>Nuts - Thumb - Basic</i>
6-32 UNC (3.5mm) Thread Size					
7.10 (0.28")	3.18 (0.13")	9.53		Brass	NT035C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	9.53		Stainless 303	NT035C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	12.70	6.35 (0.25")	Stainless 303	NT035C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	6.35 (0.25")	Stainless 303	NT035C-TH1912-S3 <i>Nuts - Thumb - Basic</i>
M4x0.7 (4mm Standard) Thread Size					
12.50 (0.49")	6.54 (0.26")	16.00	8.00 (0.31")	303 Stainless Steel	NT040M-TH1606-S3 <i>Nuts - Thumb - Basic</i>
8-32 UNC (4.166mm) Thread Size					
7.10 (0.28")	3.18 (0.13")	11.11		Brass	NT042C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
7.10 (0.28")	3.18 (0.13")	11.11		Stainless 303	NT042C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
9.50 (0.37")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless 303	NT042C-TH1906-S3 <i>Nuts - Thumb - Basic</i>
9.50 (0.37")	3.18 (0.13")	12.70	7.94 (0.31")	Stainless 303	NT042C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
15.90 (0.63")	3.18 (0.13")	19.05	7.94 (0.31")	Stainless 303	NT042C-TH1912-S3 <i>Nuts - Thumb - Basic</i>
10-24 UNC (4.762mm) Thread Size					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	NT048C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless 303	NT048C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless 303	NT048C-TH1206-S3 <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless 303	NT048C-TH2506-S3 <i>Nuts - Thumb - Basic</i>
10-32 UNF (4.762mm) Thread Size					
8.70 (0.34")	3.97 (0.16")	12.70		Brass	NT048F-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
8.70 (0.34")	3.97 (0.16")	12.70		Stainless 303	NT048F-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
11.10 (0.44")	4.76 (0.19")	12.70	9.53 (0.38")	Stainless 303	NT048F-TH1206-S3 <i>Nuts - Thumb - Basic</i>
11.10 (0.44")	4.76 (0.19")	25.40	9.53 (0.38")	Stainless 303	NT048F-TH2506-S3 <i>Nuts - Thumb - Basic</i>
M5x0.8 (5mm Standard) Thread Size					
11.50 (0.45")	4.00 (0.16")	20.00	10.00 (0.39")	303 Stainless Steel	NT050M-TH2007-S3 <i>Nuts - Thumb - Basic</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Nuts



Overall Length (C) mm (in.)	Head Width (B) mm (in.)	Head Diameter (A) mm (in.)	Shoulder Diameter mm	Material	Part Number
M6x1 (6mm Standard) Thread Size					
15.00 (0.59")	5.00 (0.20")	24.00	12.00 (0.47")	303 Stainless Steel	NT060M-TH2410-S3 <i>Nuts - Thumb - Basic</i>
1/4-20 UNC (6.35mm) Thread Size					
9.50 (0.37")	3.97 (0.16")	14.29		Brass	NT064C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
9.50 (0.37")	3.97 (0.16")	14.29		Stainless 303	NT064C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
12.70 (0.50")	6.35 (0.25")	19.05	12.70 (0.50")	Stainless 303	NT064C-TH1906-S3 <i>Nuts - Thumb - Basic</i>
12.70 (0.50")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless 303	NT064C-TH2506-S3 <i>Nuts - Thumb - Basic</i>
19.10 (0.75")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless 303	NT064C-TH2512-S3 <i>Nuts - Thumb - Basic</i>
25.40 (1.00")	6.35 (0.25")	25.40	12.70 (0.50")	Stainless 303	NT064C-TH2519-S3 <i>Nuts - Thumb - Basic</i>
5/16-18 UNC (7.938mm) Thread Size					
10.30 (0.41")	4.76 (0.19")	15.88		Brass	NT079C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
10.30 (0.41")	4.76 (0.19")	15.88		Stainless 303	NT079C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>
3/8-16 UNC (9.525mm) Thread Size					
11.90 (0.47")	5.56 (0.22")	19.05		Brass	NT095C-THC-BR <i>Nuts - Thumb - Collared - Brass</i>
11.90 (0.47")	5.56 (0.22")	19.05		Stainless 303	NT095C-THC-S3 <i>Nuts - Thumb - Collared - Stainless</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
4-40 UNC (2.845mm) Thread Size					
6.35 (0.25")	13.49 (0.53")	Nylon	7.94 (0.31")		THS028C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	THS028C-008-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Brass	7.94 (0.31")	Zinc Chromate Plated	THS028C-008-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	THS028C-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	15.88 (0.63")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	THS028C-008-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
7.94 (0.31")	15.88 (0.63")	Stainless Steel	9.53 (0.38")	Plain	THS028C-008-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
7.94 (0.31")	15.88 (0.63")	Steel	9.53 (0.38")	Zinc Coated	THS028C-008-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	14.29 (0.56")	Brass	7.94 (0.31")	Zinc Chromate Plated	THS028C-010-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	THS028C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	THS028C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon	7.94 (0.31")		THS028C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	THS028C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	THS028C-011-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	THS028C-011-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	17.46 (0.69")	Brass	7.94 (0.31")	Zinc Chromate Plated	** THS028C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	THS028C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	THS028C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	19.84 (0.78")	Nylon	7.94 (0.31")		** THS028C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	26.19 (1.03")	Nylon	7.94 (0.31")		** THS028C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS028C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
M3x0.5 (3mm Standard) Thread Size					
6.00 (0.24")	10.50 (0.41")	Stainless Steel	12.00 (0.47")	Plain	** THS030M-006-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	THS030M-008L-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
8.00 (0.31")	12.50 (0.49")	Stainless Steel	12.00 (0.47")	Plain	THS030M-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	14.50 (0.57")	Stainless Steel	12.00 (0.47")	Plain	** THS030M-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	8.00 (0.31")	Plain	THS030M-011-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	THS030M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	18.50 (0.73")	Stainless Steel	12.00 (0.47")	Plain	THS030M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
M3.5x0.6 (3.5mm Standard) Thread Size					
8.00 (0.31")	13.00 (0.51")	Stainless Steel	8.00 (0.31")	Plain	THS035M-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	8.00 (0.31")	Plain	THS035M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
6-32 UNC (3.5mm) Thread Size					
6.35 (0.25")	13.49 (0.53")	Nylon			THS035C-006-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
7.94 (0.31")	12.70 (0.50")	Aluminium	7.94 (0.31")	Plain	THS035C-008-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
7.94 (0.31")	12.70 (0.50")	Stainless Steel	7.94 (0.31")	Plain	THS035C-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
7.94 (0.31")	12.70 (0.50")	Steel	7.94 (0.31")	Zinc Coated	THS035C-008-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	12.70 (0.50")	Nylatron GS	9.53 (0.38")		THS035C-010-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	7.94 (0.31")	Plain	THS035C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	7.94 (0.31")	Zinc Coated	THS035C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	16.66 (0.66")	Nylon			THS035C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc, Clear Chrome Plated	THS035C-010-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	THS035C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	THS035C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	THS035C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	THS035C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	THS035C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	THS035C-010-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	THS035C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	Aluminium	9.53 (0.38")	Plain	THS035C-011-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
11.11 (0.44")	19.05 (0.75")	Stainless Steel	9.53 (0.38")	Plain	THS035C-011-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
11.11 (0.44")	19.05 (0.75")	Steel	9.53 (0.38")	Zinc Coated	THS035C-011-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	11.11 (0.44")		THS035C-019-K-3-SHL <i>Screws - Thumb - Shoulder</i>
11.11 (0.44")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS035C-011-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
12.70 (0.50")	15.88 (0.63")	Nylatron GS	9.53 (0.38")		THS035C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	7.94 (0.31")	Zinc Chromate Plated	THS035C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	7.94 (0.31")	Plain	THS035C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	7.94 (0.31")	Zinc Coated	THS035C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	Aluminium	9.53 (0.38")	Plain	THS035C-013-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	THS035C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	THS035C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **



 Long Delivery or Large Minimum Quantities
 Not in current production



Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	19.84 (0.78")	Nylon			THS035C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	THS035C-013-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Black Oxide	THS035C-013-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Black Oxide	THS035C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		12.70 (0.50")	Nickel Plated	THS035C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	THS035C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	11.11 (0.44")		THS035C-022-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")	26.19 (1.03")	Nylon			** THS035C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	32.54 (1.28")	Nylon			** THS035C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS035C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>

M4x0.7 (4mm Standard) Thread Size



8.00 (0.31")	13.00 (0.51")	Steel	15.50 (0.61")	Zinc Plated	THS040M-008-K-Z <i>Screws - Thumb - Knurled - Steel</i>
8.00 (0.31")	13.50 (0.53")	Stainless Steel	16.00 (0.63")	Plain	** THS040M-008-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.00 (0.35")	14.00 (0.55")	Stainless Steel	10.00 (0.39")	Plain	THS040M-009-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	15.50 (0.61")	Stainless Steel	16.00 (0.63")	Plain	THS040M-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	10.00 (0.39")	Plain	THS040M-011-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	10.00 (0.39")	Plain	THS040M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.00 (0.75")	Stainless Steel	10.00 (0.39")	Plain	THS040M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	19.50 (0.77")	Stainless Steel	16.00 (0.63")	Plain	THS040M-014-KL-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	10.00 (0.39")	Plain	THS040M-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
17.00 (0.67")	23.50 (0.93")	Stainless Steel	16.00 (0.63")	Plain	THS040M-017-K-3 <i>Screws - Thumb - Knurled - Stainless</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
8-32 UNC (4.166mm) Thread Size					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	11.11 (0.44")		THS042C-016-K-3-SHL <i>Screws - Thumb - Shoulder</i>
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		THS042C-016-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	13.11 (0.52")	Nylon			THS042C-010-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Nylatron GS	9.53 (0.38")		THS042C-010-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	9.53 (0.38")	Plain	THS042C-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	9.53 (0.38")	Zinc Coated	THS042C-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	15.88 (0.63")	303 Stainless Steel	9.53 (0.38")		THS042C-010-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	THS042C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	THS042C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		THS042C-017-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	11.11 (0.44")		THS042C-017-K-3-SHL <i>Screws - Thumb - Shoulder</i>
10.30 (0.41")	18.26 (0.72")	Brass	11.11 (0.44")	Black Oxide	THS042C-010-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	THS042C-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Black Oxide	THS042C-010-KS-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	THS042C-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Black Oxide	THS042C-010-KL-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	THS042C-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		THS042C-019-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	THS042C-013-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.28 (0.64")	Nylon			THS042C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Brass	9.53 (0.38")	Zinc Chromate Plated	THS042C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS042C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	9.53 (0.38")	Plain	THS042C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	9.53 (0.38")	Zinc Coated	THS042C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	11.11 (0.44")		THS042C-021-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		THS042C-021-KL-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	THS042C-013-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	THS042C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	THS042C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	22.23 (0.88")	303 Stainless Steel	4.76 (0.19")		THS042C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Nickel Plated	THS042C-013-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		9.53 (0.38")	Nickel Plated	THS042C-013-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")		11.11 (0.44")	Black Oxide	THS042C-013-K-BB-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	20.64 (0.81")	Brass	9.53 (0.38")	Zinc Chromate Plated	THS042C-016-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
15.88 (0.63")	20.64 (0.81")	Stainless Steel	9.53 (0.38")	Plain	THS042C-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	20.64 (0.81")	Steel	9.53 (0.38")	Zinc Coated	THS042C-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Aluminium	11.11 (0.44")	Plain	THS042C-016-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	THS042C-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	THS042C-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS042C-024-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	THS042C-019-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			THS042C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	9.53 (0.38")		THS042C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
20.64 (0.81")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS042C-021-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	34.93 (1.38")	303 Stainless Steel	4.76 (0.19")		THS042C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			THS042C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>



Usually stocked or Short Delivery
** Available while stocks last **

Long Delivery or Large Minimum Quantities
Not in current production

Thumb Screws



Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
10-24 UNC (4.762mm) Thread Size					
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS048C-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS048C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-013-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	16.28 (0.64")	Nylon			THS048C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	22.63 (0.89")	Nylon			THS048C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS048C-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS048C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")		Steel	19.05 (0.75")	Black Oxide	THS048C-019-K-CS-DP <i>Screws - Thumb - Dog Point</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	THS048C-025-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	THS048C-025-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS048C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	28.98 (1.14")	Nylon			THS048C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")		Steel	19.05 (0.75")	Black Oxide	THS048C-032-K-CS-DP <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS048C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048C-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		THS048C-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		Steel	19.05 (0.75")	Black Oxide	THS048C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048C-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		THS048C-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
3/16-24 BSW (4.762mm) Thread Size					
12.70 (0.50")	31.80 (1.25")	Steel	13.70 (0.54")	Zinc Plated	THS048W-013-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	30.40 (1.20")	Steel	13.70 (0.54")	Zinc Plated	THS048W-019-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	44.50 (1.75")	Steel	13.70 (0.54")	Zinc Plated	THS048W-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
10-32 UNF (4.762mm) Thread Size					
7.94 (0.31")	15.88 (0.63")	303 Stainless Steel	12.70 (0.50")		THS048F-016-K-3-SHL <i>Screws - Thumb - Shoulder</i>
9.53 (0.38")	14.29 (0.56")	Aluminium	11.11 (0.44")	Plain	THS048F-010-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
9.53 (0.38")	14.29 (0.56")	Stainless Steel	11.11 (0.44")	Plain	THS048F-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
9.53 (0.38")	14.29 (0.56")	Steel	11.11 (0.44")	Zinc Coated	THS048F-010-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
9.53 (0.38")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	THS048F-010-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
9.53 (0.38")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	THS048F-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	THS048F-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
9.53 (0.38")	17.46 (0.69")	303 Stainless Steel	12.70 (0.50")		THS048F-017-K-3-SHL <i>Screws - Thumb - Shoulder</i>
10.30 (0.41")	18.26 (0.72")		9.53 (0.38")	Nickel Plated	THS048F-010-KS-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		11.11 (0.44")	Nickel Plated	THS048F-010-K-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
10.30 (0.41")	18.26 (0.72")		12.70 (0.50")	Nickel Plated	THS048F-010-KL-BN-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
11.11 (0.44")	19.05 (0.75")	303 Stainless Steel	12.70 (0.50")		THS048F-019-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	THS048F-013-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.28 (0.64")	Nylon			** THS048F-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Aluminium	11.11 (0.44")	Plain	THS048F-013-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
12.70 (0.50")	17.46 (0.69")	Brass	11.11 (0.44")	Zinc Chromate Plated	THS048F-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	17.46 (0.69")	Nylatron GS	9.53 (0.38")		THS048F-013-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
12.70 (0.50")	17.46 (0.69")	Stainless Steel	11.11 (0.44")	Plain	THS048F-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	17.46 (0.69")	Steel	11.11 (0.44")	Zinc Coated	THS048F-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	20.64 (0.81")	303 Stainless Steel	12.70 (0.50")		THS048F-021-K-3-SHL <i>Screws - Thumb - Shoulder</i>
12.70 (0.50")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	THS048F-013-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	THS048F-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	THS048F-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	6.35 (0.25")		THS048F-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
14.29 (0.56")	22.23 (0.88")	303 Stainless Steel	12.70 (0.50")		THS048F-022-K-3-SHL <i>Screws - Thumb - Shoulder</i>
15.88 (0.63")	20.64 (0.81")	Aluminium	11.11 (0.44")	Plain	THS048F-016-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
15.88 (0.63")	20.64 (0.81")	Brass	11.11 (0.44")	Zinc Chromate Plated	THS048F-016-K-BZ <i>Screws - Thumb - Knurled - Brass</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
15.88 (0.63")	20.64 (0.81")	Stainless Steel	11.11 (0.44")	Plain	THS048F-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	20.64 (0.81")	Steel	11.11 (0.44")	Zinc Coated	THS048F-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	Brass	11.11 (0.44")	Zinc, Clear Chrome Plated	THS048F-016-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	23.81 (0.94")	Stainless Steel	11.11 (0.44")	Plain	THS048F-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	23.81 (0.94")	Steel	11.11 (0.44")	Zinc Coated	THS048F-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS048F-016-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	12.70 (0.50")		THS048F-024-K-3-SHL <i>Screws - Thumb - Shoulder</i>
19.05 (0.75")		Carbon Steel		Zinc Plated	THS048F-019-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
19.05 (0.75")	22.63 (0.89")	Nylon			THS048F-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS048F-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS048F-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
22.23 (0.88")	42.86 (1.69")	Steel	#Error	Black Oxide	THS048F-022-H-CB <i>Screws - Thumb - Half Turn</i>
25.40 (1.00")		Carbon Steel		Zinc Plated	THS048F-025-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
25.40 (1.00")	30.16 (1.19")	Nylatron GS	19.05 (0.75")		THS048F-025-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		THS048F-025-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	12.70 (0.50")		THS048F-025-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	#Error		THS048F-025-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	Hardened Steel	#Error	Black Oxide	THS048F-025-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	Unhardened Steel	#Error	Black Oxide	THS048F-025-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	6.35 (0.25")		THS048F-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	28.98 (1.14")	Nylon			THS048F-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	50.80 (2.00")	303 Stainless Steel	#Error		THS048F-038-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	50.80 (2.00")	Unhardened Steel	#Error	Black Oxide	THS048F-038-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	50.80 (2.00")	Hardened Steel	#Error	Black Oxide	THS048F-038-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")		303 Stainless Steel	15.88 (0.63")		THS048F-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048F-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		12L14 Steel	15.88 (0.63")	Black Oxide	THS048F-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	15.88 (0.63")		THS048F-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>



Usually stocked or Short Delivery
** Available while stocks last **

Long Delivery or Large Minimum Quantities
Not in current production

Thumb Screws



Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
M5x0.8 (5mm Standard) Thread Size					
9.00 (0.35")	14.00 (0.55")	Stainless Steel	11.00 (0.43")	Plain	THS050M-009-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
10.00 (0.39")	16.00 (0.63")	Stainless Steel	20.00 (0.79")	Plain	THS050M-010-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
11.00 (0.43")	16.00 (0.63")	Stainless Steel	11.00 (0.43")	Plain	THS050M-011-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.00 (0.47")	23.70 (0.93")	Steel	13.70 (0.54")	Zinc Plated	THS050M-012-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	18.00 (0.71")	Stainless Steel	11.00 (0.43")	Plain	THS050M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	20.00 (0.79")	Stainless Steel	20.00 (0.79")	Plain	THS050M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	21.00 (0.83")	Stainless Steel	11.00 (0.43")	Plain	THS050M-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	27.70 (1.09")	Steel	13.70 (0.54")	Zinc Plated	THS050M-016-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
17.00 (0.67")	24.00 (0.94")	Stainless Steel	20.00 (0.79")	Plain	THS050M-017-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
20.00 (0.79")	31.70 (1.25")	Steel	13.70 (0.54")	Zinc Plated	THS050M-020-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
22.00 (0.87")	29.00 (1.14")	Stainless Steel	20.00 (0.79")	Plain	THS050M-022-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
25.00 (0.98")	36.70 (1.44")	Steel	13.70 (0.54")	Zinc Plated	THS050M-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
27.00 (1.06")	34.00 (1.34")	Stainless Steel	20.00 (0.79")	Plain	THS050M-027-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
M6x1 (6mm Standard) Thread Size					
12.00 (0.47")		Steel		Zinc Plated	THS060M-012-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
13.00 (0.51")	19.00 (0.75")	Stainless Steel	13.00 (0.51")	Plain	THS060M-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	13.00 (0.51")	Plain	THS060M-014-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
14.00 (0.55")	21.00 (0.83")	Stainless Steel	24.00 (0.94")	Plain	THS060M-014-KL-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")		Steel		Zinc Plated	THS060M-016-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
16.00 (0.63")	22.00 (0.87")	Stainless Steel	13.00 (0.51")	Plain	THS060M-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
16.00 (0.63")	25.00 (0.98")	Stainless Steel	24.00 (0.94")	Plain	THS060M-016-KL-3 <i>Screws - Thumb - Knurled - Stainless</i>
18.00 (0.71")	24.00 (0.94")	Stainless Steel	13.00 (0.51")	Plain	THS060M-018-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
19.00 (0.75")	25.00 (0.98")	Stainless Steel	13.00 (0.51")	Plain	THS060M-019-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
20.00 (0.79")		Steel		Zinc Plated	THS060M-020-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
21.00 (0.83")	30.00 (1.18")	Stainless Steel	24.00 (0.94")	Plain	THS060M-021-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
25.00 (0.98")		Steel		Zinc Plated	THS060M-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
26.00 (1.02")	35.00 (1.38")	Stainless Steel	24.00 (0.94")	Plain	THS060M-026-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
40.00 (1.57")		Steel		Zinc Plated	THS060M-040-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
1/4-20 UNC (6.35mm) Thread Size					
9.53 (0.38")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	THS064C-010-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
9.53 (0.38")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	THS064C-010-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
9.53 (0.38")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	THS064C-010-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")		Carbon Steel		Zinc Plated	THS064C-013-F-CZ-NT <i>Screws - Thumb - Nylon Tip</i>
12.70 (0.50")	16.66 (0.66")	Nylon			THS064C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	19.05 (0.75")	Aluminium	12.70 (0.50")	Plain	THS064C-013-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
12.70 (0.50")	19.05 (0.75")	Brass	12.70 (0.50")	Zinc Chromate Plated	THS064C-013-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
12.70 (0.50")	19.05 (0.75")	Stainless Steel	12.70 (0.50")	Plain	THS064C-013-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
12.70 (0.50")	19.05 (0.75")	Steel	12.70 (0.50")	Zinc Coated	THS064C-013-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
12.70 (0.50")	22.23 (0.88")	Aluminium	12.70 (0.50")	Plain	THS064C-013-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
12.70 (0.50")	22.23 (0.88")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	THS064C-013-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
12.70 (0.50")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	THS064C-013-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
12.70 (0.50")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	THS064C-013-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
12.70 (0.50")	25.40 (1.00")	303 Stainless Steel	7.94 (0.31")		THS064C-013-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-013-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	28.58 (1.13")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-013-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
12.70 (0.50")	33.34 (1.31")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-013-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
15.88 (0.63")	22.23 (0.88")	Stainless Steel	12.70 (0.50")	Plain	THS064C-016-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
15.88 (0.63")	22.23 (0.88")	Steel	12.70 (0.50")	Zinc Coated	THS064C-016-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	19.05 (0.75")		THS064C-016-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	23.81 (0.94")	303 Stainless Steel	25.40 (1.00")		THS064C-016-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
15.88 (0.63")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	THS064C-016-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
15.88 (0.63")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	THS064C-016-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
15.88 (0.63")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	THS064C-016-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	23.01 (0.91")	Nylon			THS064C-019-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	12.70 (0.50")		THS064C-019-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
19.05 (0.75")	23.81 (0.94")	Nylatron GS	19.05 (0.75")		THS064C-019-KL-NY <i>Screws - Thumb - Knurled - Nylon</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
19.05 (0.75")	25.40 (1.00")	Aluminium	12.70 (0.50")	Plain	THS064C-019-K-AL <i>Screws - Thumb - Knurled - Aluminium</i>
19.05 (0.75")	25.40 (1.00")	Brass	12.70 (0.50")	Zinc Chromate Plated	THS064C-019-K-BZ <i>Screws - Thumb - Knurled - Brass</i>
19.05 (0.75")	25.40 (1.00")	Stainless Steel	12.70 (0.50")	Plain	THS064C-019-K-3 <i>Screws - Thumb - Knurled - Stainless</i>
19.05 (0.75")	25.40 (1.00")	Steel	12.70 (0.50")	Zinc Coated	THS064C-019-K-CZ <i>Screws - Thumb - Knurled - Steel</i>
19.05 (0.75")	28.58 (1.13")	Aluminium	12.70 (0.50")	Plain	THS064C-019-K-AL-WF <i>Screws - Thumb - Knurled - Washer Face - Aluminium</i>
19.05 (0.75")	28.58 (1.13")	Brass	12.70 (0.50")	Zinc, Clear Chrome Plated	THS064C-019-K-BZ-WF <i>Screws - Thumb - Knurled - Washer Face - Brass</i>
19.05 (0.75")	28.58 (1.13")	Stainless Steel	12.70 (0.50")	Plain	THS064C-019-K-SS-WF <i>Screws - Thumb - Knurled - Washer Face - Stainless Steel</i>
19.05 (0.75")	28.58 (1.13")	Steel	12.70 (0.50")	Zinc Coated	THS064C-019-K-CS-WF <i>Screws - Thumb - Knurled - Washer Face - Steel</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	34.93 (1.38")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	39.69 (1.56")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-019-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	29.36 (1.16")	Nylon			THS064C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	30.16 (1.19")	Nylatron GS	19.05 (0.75")		THS064C-025-K-NY <i>Screws - Thumb - Knurled - Nylon</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	19.05 (0.75")		THS064C-025-K-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	36.51 (1.44")	303 Stainless Steel	25.40 (1.00")		THS064C-025-KL-3-N <i>Screws - Thumb - Knurled - Stainless - Slim Head</i>
25.40 (1.00")	38.10 (1.50")	303 Stainless Steel	7.94 (0.31")		THS064C-025-K-3-P <i>Screws - Thumb - Knurled - Stainless - Precision Head</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	41.28 (1.63")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-025-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	46.04 (1.81")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-025-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
25.40 (1.00")	50.80 (2.00")	Steel	#Error	Black Oxide	THS064C-025-H-CB <i>Screws - Thumb - Half Turn</i>
31.75 (1.25")	47.63 (1.88")	303 Stainless Steel	#Error		THS064C-032-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	Hardened Steel	#Error	Black Oxide	THS064C-032-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	Unhardened Steel	#Error	Black Oxide	THS064C-032-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
31.75 (1.25")	47.63 (1.88")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
31.75 (1.25")		Steel	645.16 (25.40")	Black Oxide	THS064C-032-K-CS-DP <i>Screws - Thumb - Dog Point</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	53.98 (2.13")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-038-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
38.10 (1.50")	58.74 (2.31")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-038-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>

Usually stocked or Short Delivery
** Available while stocks last **



Long Delivery or Large Minimum Quantities
Not in current production



Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
38.10 (1.50")		12L14 Steel	17.46 (0.69")	Black Oxide	THS064C-038-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
38.10 (1.50")		303 Stainless Steel	17.46 (0.69")		THS064C-038-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")	60.33 (2.38")	303 Stainless Steel	#Error		THS064C-044-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	60.33 (2.38")	Hardened Steel	#Error	Black Oxide	THS064C-044-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	60.33 (2.38")	Unhardened Steel	#Error	Black Oxide	THS064C-044-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")		Steel	645.16 (25.40")	Black Oxide	THS064C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")	66.68 (2.63")	Malleable Iron	22.23 (0.88")	Tumbled	THS064C-051-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
50.80 (2.00")	66.68 (2.63")	Malleable Iron	20.64 (0.81")	Tumbled	THS064C-051-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
50.80 (2.00")	71.44 (2.81")	Malleable Iron	31.75 (1.25")	Tumbled	THS064C-051-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
50.80 (2.00")		Nylon			** THS064C-051-F-NY <i>Screws - Thumb - Flat Key Head - Nylon</i>
57.15 (2.25")		Steel	645.16 (25.40")	Black Oxide	THS064C-057-K-CS-DP <i>Screws - Thumb - Dog Point</i>
63.50 (2.50")		12L14 Steel	17.46 (0.69")	Black Oxide	THS064C-064-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		303 Stainless Steel	17.46 (0.69")		THS064C-064-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

1/4-20 BSW (6.35mm) Thread Size



12.70 (0.50")		Steel		Zinc Plated	THS064W-013-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
19.10 (0.75")		Steel		Zinc Plated	THS064W-019-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")		Steel		Zinc Plated	THS064W-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
31.80 (1.25")		Steel		Zinc Plated	THS064W-032-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		Steel		Zinc Plated	THS064W-038-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
5/16-18 UNC (7.938mm) Thread Size					
12.70 (0.50")	30.16 (1.19")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-013-FL-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
12.70 (0.50")	31.75 (1.25")		44.45 (1.75")		THS079C-013-W-CS <i>Screws - Thumb - Wing - Steel</i>
12.70 (0.50")	17.07 (0.67")	Nylon			THS079C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
19.05 (0.75")		Steel		Zinc Plated	THS079W-019-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	36.51 (1.44")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	38.10 (1.50")	Steel	44.45 (1.75")		THS079C-019-W-CS <i>Screws - Thumb - Wing - Steel</i>
19.05 (0.75")	39.69 (1.56")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")		Steel		Zinc Plated	THS079W-025-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	26.99 (1.06")	Steel	#Error	Black Oxide	THS079C-025-H-CB <i>Screws - Thumb - Half Turn</i>
25.40 (1.00")	42.86 (1.69")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	44.45 (1.75")	Steel	44.45 (1.75")		THS079C-025-W-CS <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	29.77 (1.17")	Nylon			THS079C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")	49.21 (1.94")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
31.75 (1.25")		Steel	28.58 (1.13")	Black Oxide	THS079C-032-K-CS-DP <i>Screws - Thumb - Dog Point</i>
31.80 (1.25")		Steel		Zinc Plated	THS079W-032-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")		Steel		Zinc Plated	THS079W-038-F-CS <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	42.47 (1.67")	Nylon			THS079C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	55.56 (2.19")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	57.15 (2.25")	Hardened Steel	#Error	Black Oxide	THS079C-038-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	Unhardened Steel	#Error	Black Oxide	THS079C-038-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	303 Stainless Steel	#Error		THS079C-038-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	57.15 (2.25")	Steel	44.45 (1.75")		THS079C-038-W-CS <i>Screws - Thumb - Wing - Steel</i>
38.10 (1.50")	58.74 (2.31")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-038-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
44.45 (1.75")		Steel	28.58 (1.13")	Black Oxide	THS079C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
44.45 (1.75")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-044-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
44.45 (1.75")		303 Stainless Steel	19.05 (0.75")		THS079C-044-K-S3-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.17 (2.17")	Nylon			** THS079C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
50.80 (2.00")	68.26 (2.69")	Malleable Iron	25.40 (1.00")	Tumbled	THS079C-051-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
57.15 (2.25")		Steel	28.58 (1.13")	Black Oxide	THS079C-057-K-CS-DP <i>Screws - Thumb - Dog Point</i>
57.15 (2.25")		303 Stainless Steel	19.05 (0.75")		THS079C-057-K-S3-FT <i>Screws - Thumb - Flat Tip</i>
57.15 (2.25")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-057-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	THS079C-070-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
76.20 (3.00")		12L14 Steel	19.05 (0.75")	Black Oxide	THS079C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		303 Stainless Steel	19.05 (0.75")		THS079C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws



Thread Length (TI) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
3/8-16 UNC (9.525mm) Thread Size					
12.70 (0.50")	17.46 (0.69")	Nylon			** THS095C-013-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
12.70 (0.50")	34.93 (1.38")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-013-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
19.05 (0.75")	38.10 (1.50")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-019-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
19.05 (0.75")	41.28 (1.63")	Steel	46.04 (1.81")		THS095C-019-W-CS <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	30.16 (1.19")	Nylon			** THS095C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
25.40 (1.00")	44.45 (1.75")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	47.63 (1.88")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-025-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	47.63 (1.88")	Steel	46.04 (1.81")		THS095C-025-W-CS <i>Screws - Thumb - Wing - Steel</i>
25.40 (1.00")	50.80 (2.00")	Malleable Iron	36.51 (1.44")	Tumbled	THS095C-025-W-CS-WF <i>Screws - Thumb - Wing - Washer Face - Steel</i>
31.75 (1.25")	50.80 (2.00")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	42.86 (1.69")	Nylon			THS095C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	57.15 (2.25")	Malleable Iron	26.99 (1.06")	Tumbled	THS095C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	60.33 (2.38")	Steel	46.04 (1.81")		THS095C-038-W-CS <i>Screws - Thumb - Wing - Steel</i>
38.10 (1.50")	63.50 (2.50")	303 Stainless Steel	#Error		THS095C-038-Q-3 <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	63.50 (2.50")	Hardened Steel	#Error	Black Oxide	THS095C-038-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	63.50 (2.50")	Unhardened Steel	#Error	Black Oxide	THS095C-038-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
38.10 (1.50")	68.26 (2.69")	Steel	#Error	Black Oxide	THS095C-038-H-CB <i>Screws - Thumb - Half Turn</i>
44.45 (1.75")		Steel	31.75 (1.25")	Black Oxide	THS095C-044-K-CS-DP <i>Screws - Thumb - Dog Point</i>
50.80 (2.00")	73.03 (2.88")	Malleable Iron	31.75 (1.25")	Tumbled	THS095C-051-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
50.80 (2.00")	76.20 (3.00")	Unhardened Steel	#Error	Black Oxide	THS095C-051-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")	76.20 (3.00")	Hardened Steel	#Error	Black Oxide	THS095C-051-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-051-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")		303 Stainless Steel	22.23 (0.88")		THS095C-051-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
50.80 (2.00")	55.56 (2.19")	Nylon			THS095C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
63.50 (2.50")		303 Stainless Steel	22.23 (0.88")		THS095C-064-K-CS-FT <i>Screws - Thumb - Flat Tip</i>
63.50 (2.50")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-064-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	THS095C-070-K-CS-DP <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")		303 Stainless Steel	22.23 (0.88")		THS095C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>



 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws

Thread Length (Tl) mm (in.)	Overall Length (L) mm (in.)	Material	Head Diameter (D) mm	Finish	Part Number
76.20 (3.00")		12L14 Steel	22.23 (0.88")	Black Oxide	THS095C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
1/2-13 UNC (12.7mm) Thread Size					
19.05 (0.75")	47.63 (1.88")	Malleable Iron	36.51 (1.44")	Tumbled	THS127C-019-F-CS-WF <i>Screws - Thumb - Flat Key Head - Washer Face - Steel</i>
25.40 (1.00")	49.21 (1.94")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-025-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
25.40 (1.00")	30.56 (1.20")	Nylon			THS127C-025-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
31.75 (1.25")	55.56 (2.19")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-032-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	43.33 (1.71")	Nylon			THS127C-038-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
38.10 (1.50")	61.91 (2.44")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-038-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
38.10 (1.50")	69.85 (2.75")	Steel	#Error	Black Oxide	THS127C-038-H-CB <i>Screws - Thumb - Half Turn</i>
44.45 (1.75")	69.85 (2.75")	Hardened Steel	#Error	Black Oxide	THS127C-044-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
44.45 (1.75")	69.85 (2.75")	Unhardened Steel	#Error	Black Oxide	THS127C-044-Q-CS <i>Screws - Thumb - 1-4 Turn</i>
50.80 (2.00")	55.96 (2.20")	Nylon			THS127C-051-K-NY-WF <i>Screws - Thumb - Knurled - Washer Face - Nylon</i>
57.15 (2.25")	82.55 (3.25")	Hardened Steel	#Error	Black Oxide	THS127C-057-Q-CH <i>Screws - Thumb - 1-4 Turn</i>
63.50 (2.50")	87.31 (3.44")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-064-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
69.85 (2.75")		Steel	31.75 (1.25")	Black Oxide	THS127C-070-K-CS-DP <i>Screws - Thumb - Dog Point</i>
76.20 (3.00")	100.01 (3.94")	Malleable Iron	33.34 (1.31")	Tumbled	THS127C-076-F-MI <i>Screws - Thumb - Flat Key Head - Steel</i>
76.20 (3.00")	101.60 (4.00")	Steel	57.15 (2.25")		THS127C-076-W-CS <i>Screws - Thumb - Wing - Steel</i>
76.20 (3.00")		12L14 Steel	25.40 (1.00")	Black Oxide	THS127C-076-K-CB-FT <i>Screws - Thumb - Flat Tip</i>
76.20 (3.00")		303 Stainless Steel	25.40 (1.00")		THS127C-076-K-CS-FT <i>Screws - Thumb - Flat Tip</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material / Finish	Shank Length (A) mm	Part Number
4-40 UNC (2.845mm) Thread Size				
15.88 (0.63")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	SCC028C-010-016-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	9.53 (0.38")	SCC028C-010-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
17.46 (0.69")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	SCC028C-011-017-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	11.11 (0.44")	SCC028C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
19.05 (0.75")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	SCC028C-013-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	12.70 (0.50")	SCC028C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	SCC028C-014-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	SCC028C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	SCC028C-016-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	3.18 (0.13")	303 Stainless Steel	14.29 (0.56")	SCC028C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	SCC028C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	15.88 (0.63")	SCC028C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	SCC028C-017-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	SCC028C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	SCC028C-019-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	3.18 (0.13")	303 Stainless Steel	17.46 (0.69")	SCC028C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	SCC028C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	SCC028C-021-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	3.18 (0.13")	303 Stainless Steel	19.05 (0.75")	SCC028C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	SCC028C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	SCC028C-022-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	3.18 (0.13")	303 Stainless Steel	20.64 (0.81")	SCC028C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	22.23 (0.88")	SCC028C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	SCC028C-024-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	SCC028C-025-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	3.18 (0.13")	303 Stainless Steel	23.81 (0.94")	SCC028C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	3.18 (0.13")	303 Stainless Steel	25.40 (1.00")	SCC028C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>



Usually stocked or Short Delivery

** Available while stocks last **



Long Delivery or Large Minimum Quantities



Not in current production

Thumb Screws - Captive



Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material / Finish	Shank Length (A) mm	Part Number
6-32 UNC (3.5mm) Thread Size				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	SCC035C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	SCC035C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	SCC035C-017-021B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
21.43 (0.84")	7.14 (0.28")	303 Stainless Steel	16.67 (0.66")	SCC035C-017-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	SCC035C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	SCC035C-018-023-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.02 (0.91")	7.14 (0.28")	303 Stainless Steel	18.26 (0.72")	SCC035C-018-023B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	SCC035C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Black Oxide	19.10 (0.75")	SCC035C-024-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>
23.80 (0.94")	4.80 (0.19")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	SCC035C-024-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	SCC035C-020-025B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
24.61 (0.97")	7.14 (0.28")	303 Stainless Steel	19.84 (0.78")	SCC035C-020-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	SCC035C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	SCC035C-021-026B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.19 (1.03")	7.14 (0.28")	303 Stainless Steel	21.43 (0.84")	SCC035C-021-026-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	SCC035C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	SCC035C-023-028B-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
27.78 (1.09")	7.14 (0.28")	303 Stainless Steel	23.02 (0.91")	SCC035C-023-028-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	SCC035C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	SCC035C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	SCC035C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	SCC035C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	SCC035C-027-035-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	SCC035C-029-037-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	SCC035C-030-038-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	SCC035C-032-040-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>



Usually stocked or Short Delivery
 ** Available while stocks last **

Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material / Finish	Shank Length (A) mm	Part Number
8-32 UNC (4.166mm) Thread Size				
19.05 (0.75")	5.56 (0.22")	303 Stainless Steel	11.11 (0.44")	SCC042C-011-019-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
20.64 (0.81")	5.56 (0.22")	303 Stainless Steel	12.70 (0.50")	SCC042C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
22.23 (0.88")	5.56 (0.22")	303 Stainless Steel	14.29 (0.56")	SCC042C-014-022-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
23.81 (0.94")	5.56 (0.22")	303 Stainless Steel	15.88 (0.63")	SCC042C-016-024-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	5.56 (0.22")	303 Stainless Steel	17.46 (0.69")	SCC042C-017-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	19.10 (0.75")	SCC042C-025-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
25.40 (1.00")	9.50 (0.37")	Half-Hard Brass / Black Oxide	19.10 (0.75")	SCC042C-025-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>
26.99 (1.06")	5.56 (0.22")	303 Stainless Steel	19.05 (0.75")	SCC042C-019-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	SCC042C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
28.58 (1.13")	5.56 (0.22")	303 Stainless Steel	20.64 (0.81")	SCC042C-021-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	5.56 (0.22")	303 Stainless Steel	22.23 (0.88")	SCC042C-022-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
31.75 (1.25")	5.56 (0.22")	303 Stainless Steel	23.81 (0.94")	SCC042C-024-032-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
33.34 (1.31")	5.56 (0.22")	303 Stainless Steel	25.40 (1.00")	SCC042C-025-033-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
34.93 (1.38")	5.56 (0.22")	303 Stainless Steel	26.99 (1.06")	SCC042C-027-035-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
36.51 (1.44")	5.56 (0.22")	303 Stainless Steel	28.58 (1.13")	SCC042C-029-037-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
38.10 (1.50")	5.56 (0.22")	303 Stainless Steel	30.16 (1.19")	SCC042C-030-038-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
39.69 (1.56")	5.56 (0.22")	303 Stainless Steel	31.75 (1.25")	SCC042C-032-040-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
10-24 UNC (4.762mm) Thread Size				
20.64 (0.81")	6.35 (0.25")	303 Stainless Steel	12.70 (0.50")	SCC048C-013-021-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
25.40 (1.00")	6.35 (0.25")	303 Stainless Steel	14.29 (0.56")	SCC048C-014-025-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
26.99 (1.06")	6.35 (0.25")	303 Stainless Steel	15.88 (0.63")	SCC048C-016-027-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
28.58 (1.13")	6.35 (0.25")	303 Stainless Steel	17.46 (0.69")	SCC048C-017-029-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
30.16 (1.19")	6.35 (0.25")	303 Stainless Steel	19.05 (0.75")	SCC048C-019-030-TH-S3 <i>Screws - Captive - Thumb - 303 Stainless</i>
10-32 UNF (4.762mm) Thread Size				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	SCC048F-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
28.60 (1.13")	9.50 (0.37")	Half-Hard Brass / Black Oxide	22.20 (0.87")	SCC048F-029-TH-BB <i>Screws - Captive - Thumb - Brass - Black Oxide</i>

 Usually stocked or Short Delivery
 ** Available while stocks last **

 Long Delivery or Large Minimum Quantities
 Not in current production

Thumb Screws - Captive

Overall Length (L) mm (in.)	Thread Length (F) mm (in.)	Material / Finish	Shank Length (A) mm	Part Number
1/4-20 UNC (6.35mm) Thread Size				
28.60 (1.13")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	22.20 (0.87")	SCC064C-029-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
31.80 (1.25")	6.40 (0.25")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	SCC064C-032-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
34.90 (1.38")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	25.40 (1.00")	SCC064C-035-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>
38.10 (1.50")	9.50 (0.37")	Half-Hard Brass / Nickel Plated	28.60 (1.13")	SCC064C-038-TH-BN <i>Screws - Captive - Thumb - Brass - Nickel Plated</i>



Usually stocked or Short Delivery

** Available while stocks last **



Long Delivery or Large Minimum Quantities



Not in current production

NOTES



Distributed By

Miniature Bearings Australia
<http://www.minibearings.com.au>
sales@minibearings.com.au

Resellers: Please place your contact sticker over our details

Avoid verbal communication

We sell an extensive range of products with varying amounts of technical data. Please assist us to provide you with accurate information by placing your orders and enquiries online or by e-mail.

Thumbs Screws & Nuts